




POWERTEX
SEA BULK® SHIPPING SOLUTIONS



SEA BULK® THERMAL LINER

This container liner is specifically designed to be loaded and discharged with the entire rear door access open. This is an ideal liner for products such as wine, because its thermal properties help to prevent temperature fluctuation. This liner has also been used to ship products with oppressive odors. The thermal properties keep the odors from permeating into the container. Other common applications are for the protection of packaged goods on pallets, loose loaded mineral products or to prevent damage to the container from the product being shipped.

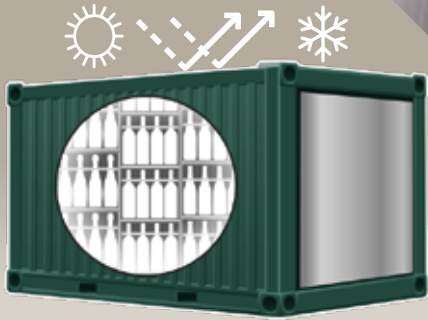



KEY BENEFITS:


- Protective barrier from contamination, heat, smell and moisture
- Stock & custom designs to meet your requirements
- Ease of installation with on-site training available




SEA BULK® THERMAL LINER

 **Ideal For The Transport Of:** Packaged goods on pallets, Wine, Naphthalene, Fertilizer, Animal Feed or products with similar characteristics

 **Material:** Proprietary four layers of laminate on HPDE woven material

 **Bulkhead:** Flexible coated woven with large zippered load opening

 **Loading System:** Forklift, Bucket Loader or Conveyor System

 **Discharge System:** Forklift, Bucket Loader or Tilt

All Powertex liners are available in various material types. The type of material that will be required for your application will all depend on the type of product that you are shipping and the various characteristics that it has.

Examples of Materials:

- FDA approved virgin grade fully extruded 5.5 mil polyethylene film with metallocene
- FDA approved virgin grade fully extruded 7 mil polyethylene film
- Anti-static polyethylene film (available in both conductive and dissipative)
- Polyethylene/Polyethylene Terephthalate (PE/PET)
- Polyethylene or polypropylene woven material in various grades (95GSM - 230GSM)
- Aluminum laminate (metalized) woven material
- Powerfoil (for use with products that require oxygen and moisture barrier properties)
- Fully extruded polyethylene film with flame retardant properties

NOTE: Material specifications and material samples are available upon request.

Manifolds Available:

- One door closed discharge manifold (24")
- Center discharge manifold (31")
- Widemouth discharge manifold (fishtail/tundish)
- Vacuum discharge fitting manifold (6")



POWERTEX
SEA BULK® SHIPPING SOLUTIONS

- SEA BULK®, since 1970, only available from POWERTEX
- Stock & custom designs to meet your requirements
- PE Film, Foil Laminate, Woven PP & Woven PE liners with rigid or flexible bulkheads
- ISO 9001:2015 & ISO 22000 certified

CONTACT

Email: sales@powertex.com
Toll Free: **1-800-769-3783**
Phone: +1-518-297-4000
Fax: +1-518-297-2634

©2018 POWERTEX | 1 Lincoln Blvd,
Rouses Point, New York 12979 USA

WWW.POWERTEX.COM